



SD4750P USB-C and USB 3.0 Dual 4K Docking Station

Part no: K39105EU | EAN code: 5028252606721

The ideal docking solution for dual 4K Ultra HD monitors

Features of the SD4750P include the ability to select between HDMI 2.0 and DP 1.2++ video ports, six USB ports, 85W of power delivery, Kensington DockWorks™ software and a three-year warranty.

Features include:

- Ultra HD video for up to two monitors
- Flexibility to select between HDMI 2.0 and DP 1.2++
- Universal docking station with support for USB-C and USB-A laptops
- Six USB ports
- 85W of power delivery
- Free DockWorks™ software
- Three-year warranty



FOR MORE INFORMATION, CONTACT: adi@arigent.co.il



Kensington

The Professionals' Choice™

SD4750P USB-C and USB 3.0 Dual 4K Docking Station

Part no: K39105EU | EAN code: 5028252606721



Dual 4K video output (HDMI 2.0 and DP 1.2 @ 60Hz)

Delivers Ultra HD images. Four video ports allow users the ability to select between HDMI 2.0 and DP 1.2++ without the need for cumbersome adapters.



Universal Docking Station


A smart technology investment for evolving and mixed computer environments, the SD4750P connects to any USB-C or USB 3.0 laptop, and supports Windows, Mac and Chrome operating systems.



Six USB ports (USB-C and USB 3.0)

Front: 1x USB-C 3.1 Gen1 at up to 5V/3A and 1x USB-A 3.1 Gen1 at up to 5V/2.4A

Back: 4x USB-A 3.1 Gen1 at up to 5V/0.9A



85W power delivery

Ideal for devices that require higher power. For USB 3.0 laptops requiring power delivery, see our optional 60W power splitter (K38310EU).



1m (3.28ft) USB-C to USB-C cable with USB 3.0 adapter included

Eliminates the frustration of compatibility issues. Ideal for graphic designers, photographers and multi-user/hot desk office environments.



Free Kensington DockWorks™ Software

Enables the best connection, performance and security from your Kensington dock.




Three-year warranty

Rest assured knowing you're covered by Kensington.


SD4750P USB-C and USB 3.0 Dual 4K Docking Station

Part no: K39105EU | EAN code: 5028252606721

Back

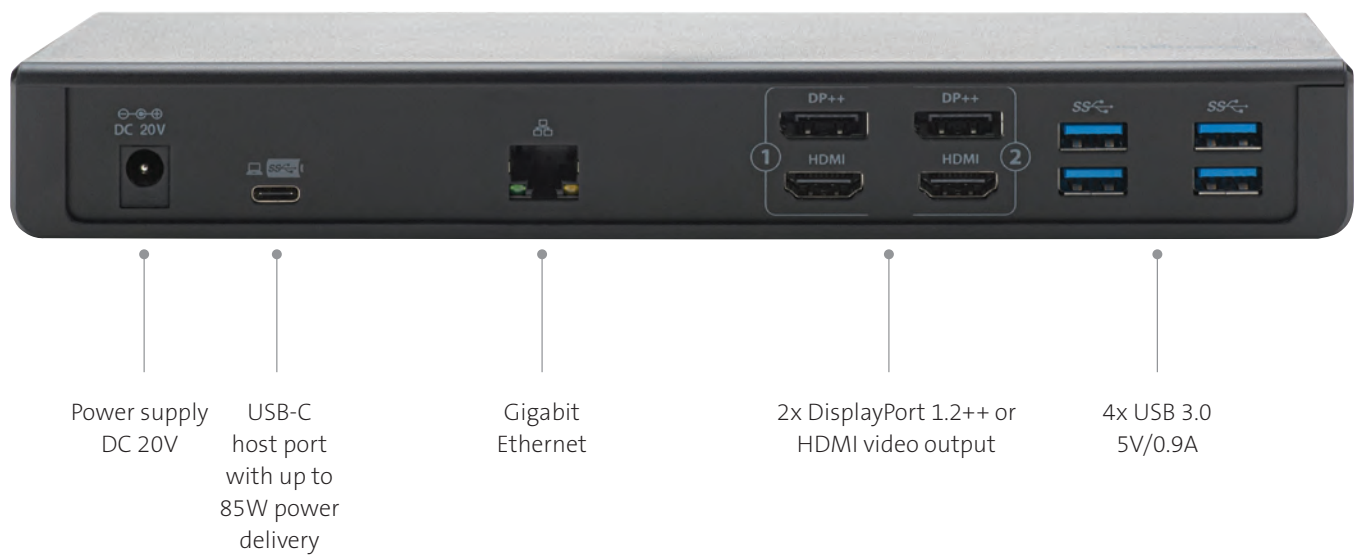

Front

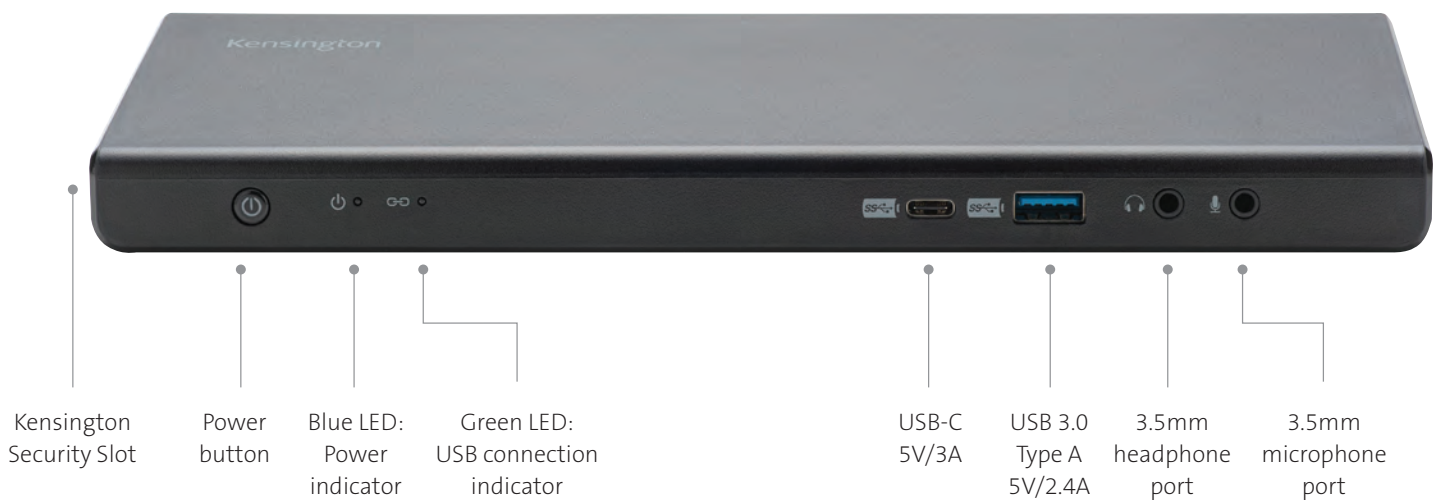

SD4750P USB-C and USB 3.0 Dual 4K Docking Station

Part no: K39105EU | EAN code: 5028252606721

System requirement

Operating systems supported	Windows 7+, macOS 10.14+, Chrome OS 44+
Plug & Play	DisplayLink driver installation required download software from Kensington.com or via Windows update
System resource requirement	CPU: Intel® Core™ i5 6th generation or above Memory: 8GB or above GPU: Intel® HD Graphics 620 or above
USB-C Power Delivery	5V/ 9V/ 12V/ 15V/ 20V @ 3A (up to 85W, 20V @ 4.25A)

USB interface

Type of USB connector	USB-C & USB 3.0 connector
Host connector	Support USB 3.1 Gen 1 Type A & Type-C

USB connections

Front ports	1 x USB 3.1 Gen 1 Type A, support BC1.2 (5V/1.5A) & Apple charging (5V/2.4A), 1 x USB 3.1 Gen 1 Type C (5V/3A)
Back ports	4 x USB 3.1 Gen 1 Type A (5V/0.9A)

Network connections

Ethernet port	RJ45
Compatible ethernet speeds	10/100/1000Mbps

Host connectivity

Host docking connector	USB-C with Power Delivery up to 85W, USB 3.0
------------------------	--

Video connections

Video connectors	2 x HDMI v2.0 and 2 x DisplayPort 1.2++
Maximum resolution supported	Single or dual monitors: 4096 x 2160 @ 60Hz
HDCP support	Yes

Audio connections

Audio connectors	3.5mm audio for headphone/speaker; 3.5mm audio for microphone
Audio channels supported	Stereo LR

Security – software

USB data encryption	HDCP 2.2 encryption over USB 2.0 & 3.1
---------------------	--

LED indicator

Blue LED	Power indicator
Green LED	USB connection indicator

Material specifications

Exterior enclosure	PC ABS with texture
Bottom metal base plate	Sheet metal
Product colour PMS	Black

Other features

Kensington Security Slot	Yes
--------------------------	-----

Product dimensions

Unit weight	0.395kg (0.87lbs)
Unit dimensions without peripherals	250 x 82.5 x 34.4mm (13.78 x 3.25 x 1.35in)
Enclosure colour & material	PMS Black, PC ABS
Desktop footprint	206.25cm ² (32in ²)

Packaging dimensions

Packaging style	Bulk package (K39105EU)
Packaging dimensions	118 x 85 x 273mm (4.65 x 3.35 x 10.75in)
Packaging weight	1.345kg (2.97lbs)
Master carton	4 pcs Width: 348mm (13.7in) Depth: 293mm (11.5in) Height: 126mm (4.96in) Weight: 5.65kg (12.46lbs)
Package content	1 x SD4750P Dock 1 x USB-C to USB-C cable with USB-A tether – 1m (3.28ft) 1 x power supply 1 x IG (instruction guide) 1 x warranty card 1 x compliance sheet

Power and environmental

Power adapter rating	Input: 100-240V; 1.8A Output: 20V DC; 6.75A (135W)
Operating temperature	0 to 40° C (32 to 104° F)
Storage temperature	-30 to 65° C (-22 to 149° F)
Relative humidity	55% operating temperature @ 25°C

Country of origin, regulatory, and warranty

Country of origin	China
Certifications & compliance	FCC, IC, CE EMC, RCM, VCCI, RoHS, ACCO RSL
Warranty	3-year limited – worldwide